


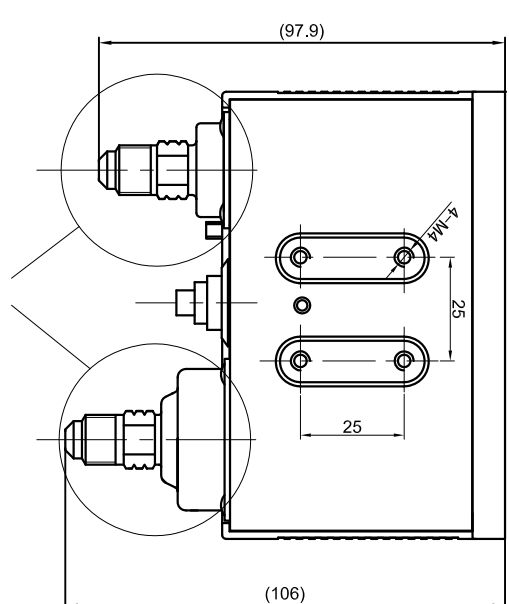

- Type: auto-auto reset
- Differential: LOW Adjustable & HIGH Non Adjustable
- Configuration: Dual
- Contact configuration: SPDT
- Rated current: 1-2 (or 1-5): 16(16)A 240Vac
1-5 (or 1-2): 1(1)A 240Vac
3-4 (or 3-6): 16(16)A 240Vac
3-6 (or 3-4): 1(1)A 240Vac
- Degree of protection: IP44 with top cover
IP20 without top cover
- Method of mounting control: Independently mounted
- Ambient working temperature: -40T65 °C
- Intended transportation conditions: -40T65 °C, 10-90%RH (non condensing situation)
- Max refrigerant temperature: 120 °C

connection variants and accessories

(1): Common contact
(1)-(2): Open on pressure rise
(1)-(3): Open on pressure drop

(3): Common contact
(3)-(4): Open on pressure rise
(3)-(6): Open on pressure drop

D17P Dual pressure control auto- auto reset (4701)
D17P Реле Давления двойное авто-авто сброс (4701)

Product traceability, date and serial number

Revision History							
Curr	Prev	Note	Signature	Date			
Dual PRESSURE							
D17P30AA1Y/S200							
		Weight		Ratio			
				1:1/(A3)			
Page1		Total					

Product code structure

- Type
D
- Case size
17 Case 108mm
- Product type
P Pressure Switch
- Pressure range (xx)
30 7...31 barg
- Reset type
AA auto-auto(dual switch)
- Product configuration
1 Standard version
- Pressure connection (y)
M 7/16-20UNF
C Capillary flare nut
- Pin contact configuration
S Standard AgNi
- Kit and packaging
2 topcover + knob + instruction sheet
- Customization
00 standard model

Available pressure connections

