


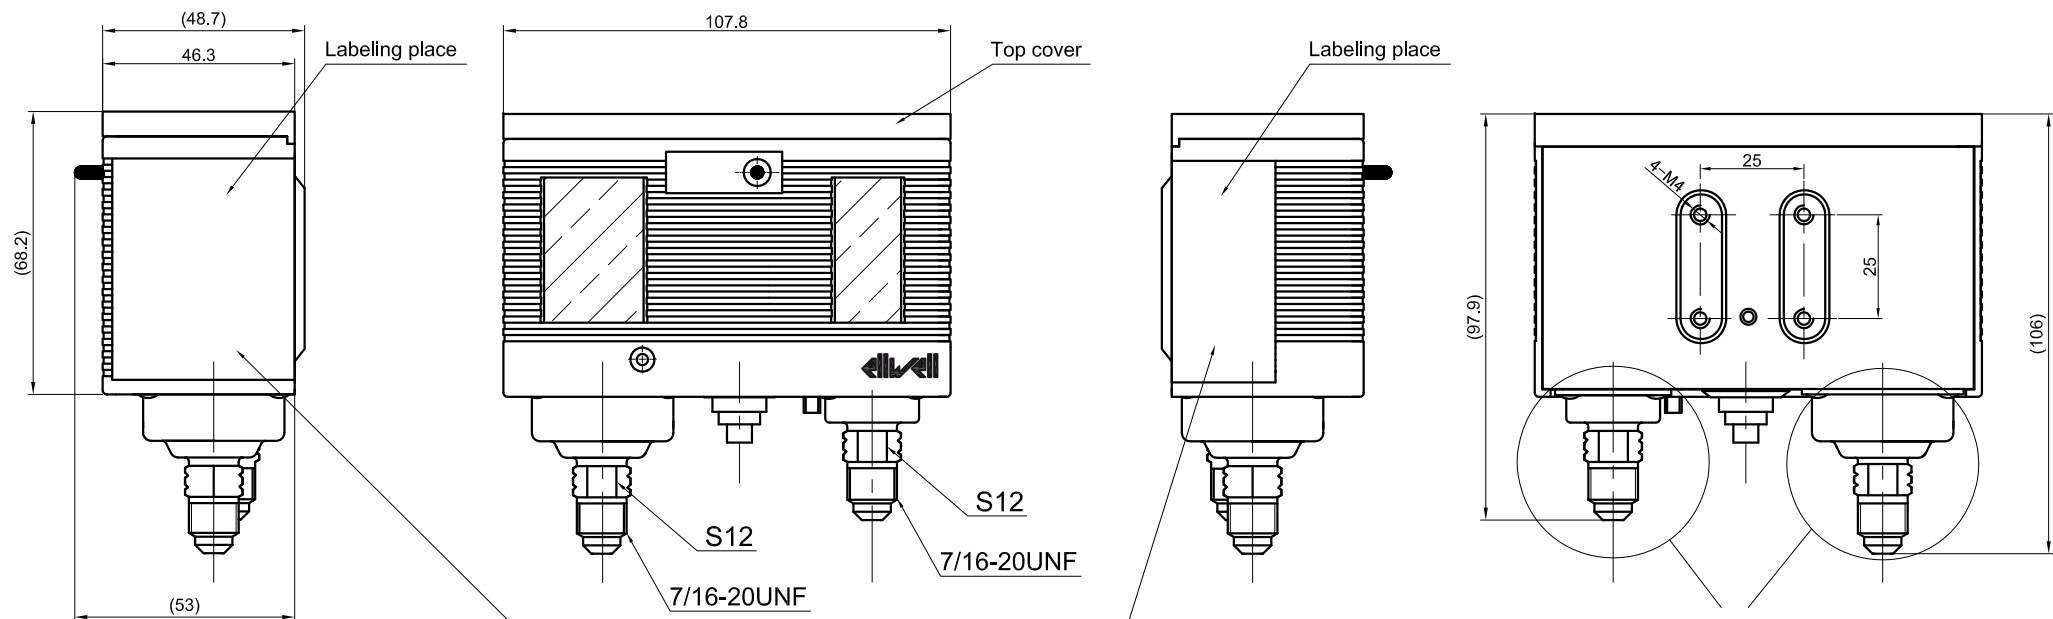


see next page for available connection variants and accessories

Specifications

- Type: auto-manual reset
- Differential: LOW Adjustable & HIGH Non Adjustable
- Configuration: Dual
- Contact configuration: SPDT
- Rated current: 1-2 (or 1-5): 16(16)A 240Vac
1-5 (or 1-2): 1(1)A 240Vac
3-4 (or 3-6): 16(16)A 240Vac
3-6 (or 3-4): 1(1)A 240Vac
- Degree of protection: IP30 with top cover
IP20 without top cover
- Method of mounting control: Independently mounted
- Ambient working temperature: -40T65 °C
- Intended transportation conditions: -40T65 °C, 10-90%RH (non condensing situation)
- Max refrigerant temperature: 120°C

-PS:17 Bar	1 0 L 2
-TA:-40T65 °C	0 5
-Range:-0.3...7 Barg	-1-2(or 1-5): 16(16)A
-Diff.:0.6...4 Bar	-1-5(or 1-2): 1(1)A
-Power supply:240Vac	Made in China

eliwell Eliwell Controls srl IT 32016 Alipago	D17P30AM1yS200 D17P Dual pressure control auto-manual reset (4705)/(4715) D17P Реле давления двояное авто-ручной сброс (4705)/(4715)
CE ENEC 15 20	RN- YYMMDD-SSSSS Made in China
-PS:35 bar	4 0 M 3
-TA:-40T65 °C	6 0 H
-Range:7...31 barg	-3-6(or 3-4): 16(16)A
-Diff:≥2 bar	-3-4(or 3-6): 1(1)A
-Power supply:240Vac	

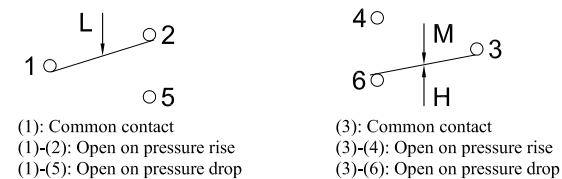

D17P Dual pressure control auto-manual reset (4705)/(4715)
D17P Реле давления двояное авто-ручной сброс (4705)/(4715)

Product traceability, date and serial number

MODEL	PRESSURE RANGE [barg]/[psig]	DIFF. RANGE [bar]/[psi]	FACTORY SETTING			Use terminals	Max.PS [barg]/[psig]	Burst Pressure [bar]/[psi]
			CUT OUT [barg]/[psig]	CUT IN [barg]/[psig]	DIFF. [bar]/[psi]			
D17P30AM1MS200 D17P30AM1CS200	7~31 / 102~450	≥2 / ≥29	20±0.4 / 290±6	≤18 / ≤261	≥2 / ≥29	3-6	35 / 507	140 / 2030
	-0.3~7 / -4~101	0.6~4 / 9~58	2±0.15 / 29±2	3±0.15 / 43±2	1±0.15 / 14±2	1-2	17 / 246	80 / 1160

Revision Hystory				
Curr	Prev	Note	Signature	Date
Designer			Date	
Checked				
Verified				
Approved				



**Dual
PRESSURE
CONTROLS**

D17P30AM1yS200				
			Weight	Ratio
				1:1(A3)
Page1			Total	
 by Schneider Electric				

Product code structure

- Type
D
- Case size
17 Case 108mm
- Product type
P Pressure Switch
- Pressure range (xx)
30 7...31 barg
- Reset type
AM auto-manual(dual switch)
- Product configuration
1 Standard version
- Pressure connection (y)
M 7/16-20UNF
C Capillary flare nut
- Pin contact configuration
S Standard AgNi
- Kit and packaging
2 topcover + knob + instruction sheet
- Customization
00 standard model

Available pressure connections

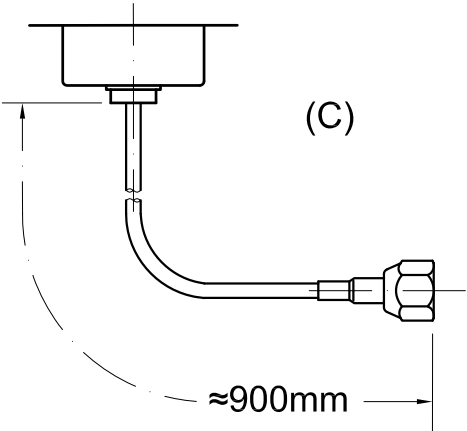

Revision Hystory					Dual PRESSURE CONTROLS	D17P30AM1yS200				
Curr	Prev	Note	Signature	Date					Weight	Ratio
										1:1(A3)
						Page2			Total	
Designer			Date			 by Schneider Electric				
Checked										
Verified										
Approved										