


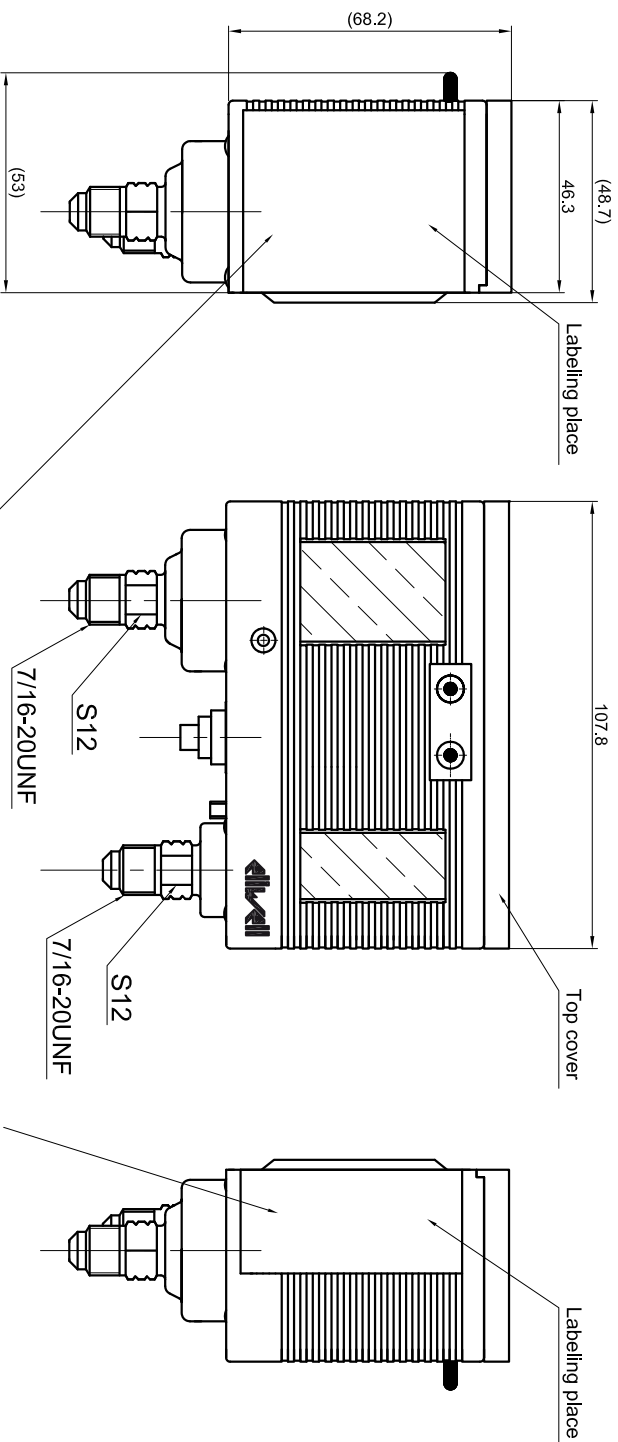


Specifications

- Type: manual-manual reset
- Differential: LOW Non Adjustable & HIGH Non Adjustable
- Configuration: Dual
- Contact configuration: SPDT
- Rated current: 1-2 (or 1-5): 16(16)A 240Vac
1-5 (or 1-2): 1(1)A 240Vac
3-4 (or 3-6): 16(16)A 240Vac
3-6 (or 3-4): 1(1)A 240Vac
- Degree of protection: IP30 with top cover
IP20 without top cover
- Method of mounting control: Independently mounted
- Ambient working temperature: -40T65 °C
- Intended transportation conditions: -40T65 °C, 10-90%RH (non condensing situation)
- Max refrigerant temperature: 120°C

-PS:17 Bar	1 0 L 2
-TA:-40T65 °C	M 0 5
-Range:-0.3...7 Barg	
-Diff: .51 Bar	
-Power supply:240Vac	
	-1-2(or 1-5): 16(16)A
	-1-5(or 1-2): 1(1)A
Made in China	

 Eliwell Controls srl Via S. Maria 10 - 47030/47130 47030 Arezzo (FC) Italy	D17P30MM1YS200 D17P Dual pressure control independent manual reset (4703)/(4713) D17P реле давления независимое ручное сброс (4703)/(4713)
 FHL 20	RN- YYMMDD-SSSSS Made in China
-PS:35 bar -TA:-40T65 °C -Range:7...31 barg -Diff:≥2 bar -Power supply:240Vac	4 0 1 M 0 3 6 0 H -3-6(or 3-4): 16(16)A -3-4(or 3-6): 1(1)A

see next page for available
connection variants and accessories

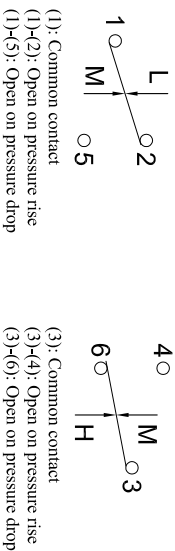

D17P Dual pressure control manual-manual reset (4703)/(4713)
D17P реле давления независимое ручное сброс (4703)/(4713)

Product traceability, date and serial number

FACTORY SETTING					
MODEL	PRESSURE RANGE [barg]/[psig]	DIFF. RANGE [barg]/[psig]	CUT OUT [barg]/[psig]	CUT IN [barg]/[psig]	DIFF. terminals
D17P30MM1NS200	7-31 / 102-450	±2 / ±29	20±0.4 / 290±6	±18 / ±261	±2 / ±29
D17P30MM1CS200	-0.3-7 / -4-101	±1 / ±14	24.15 / 29±2	±3 / ±43	±1 / ±14

Revision History				
Curr	Prev	Note	Signature	Date
Designer		Date		
Checked				
Verified				
Approved				

Dual
PRESSURE
CONTROLS

D17P30MM1ysS200				
			Weight	Ratio
				1 : 1(A3)
Page 1			Total	


by Schnacker Electric

Product code structure

- Type
- D
- Case size
- 17 Case 108mm
- Product type
- P Pressure Switch
- Pressure range (xx)
- 30 7...31 barg
- Reset type
- MM manual-manual(dual switch)
- Product configuration
- 1 Standard version
- Pressure connection (y)
- M 7/16-20UNF
- C Capillary flare nut
- Pin contact configuration
- S Standard AgNi
- Kit and packaging
- 2 topcover + knob + instruction sheet
- Customization
- 00 standard model

Available pressure connections

