


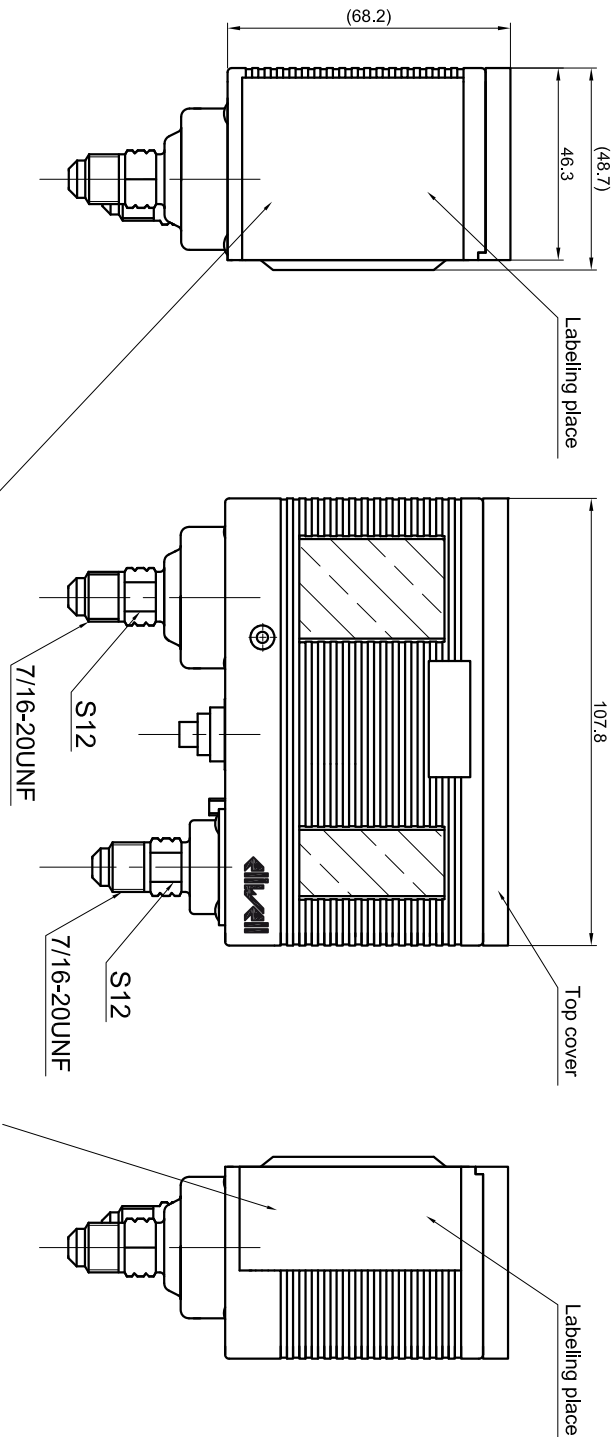

-PS: 17 Bar
-TA: -40T65 °C
-Range: -0.3...7 Barg
-Diff.: 0.6...4 Bar
-Power supply: 240Vac

1 0 L 2
0 5

-1-2 (or 1-5): 16(16)A
-1-5 (or 1-2): 1(1)A

Made in China

elwrell
Eliwell Controls srl
IT 32016 Alpiago

D17P45AA1MS200
D17P Dual press contr aut-aut reset45bar
D17P Реле давления сдвоенное авто-авто сброс 45bar



CE FHL
20

RN- YYMMDD-SSSSS
Made in China

-PS: 50 bar
-TA: -40T65 °C
-Range: 10...45 barg
-Diff: 5~15 bar
-Power supply: 240Vac

4 0
6 0 3
H

-3-6 (or 3-4): 16(16)A
-3-4 (or 3-6): 1(1)A

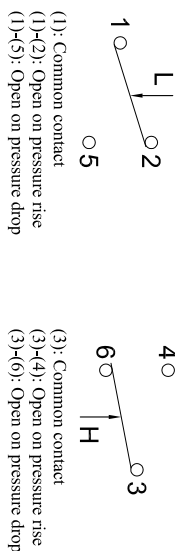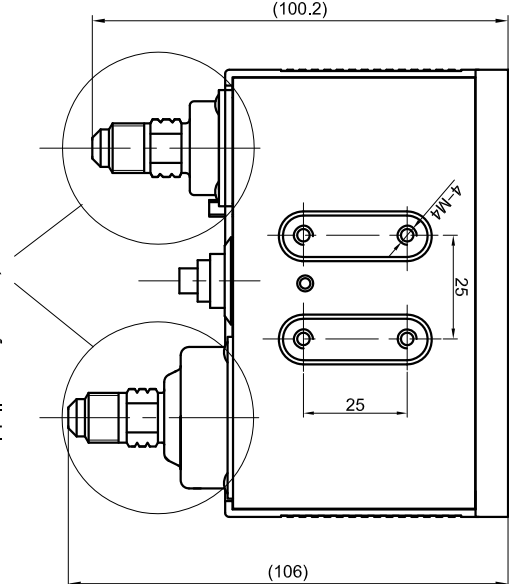

see next page for available
connection variants and accessories

- ### Specifications
- Type: auto-auto reset
 - Differential: LOW Adjustable & HIGH Non Adjustable
 - Configuration: Dual
 - Contact configuration: SPDT
 - Rated current: 1-2 (or 1-5): 16(16)A 240Vac
1-5 (or 1-2): 1(1)A 240Vac
3-4 (or 3-6): 16(16)A 240Vac
3-6 (or 3-4): 1(1)A 240Vac
 - Degree of protection: IP44 with top cover
IP20 without top cover
 - Method of mounting control: Independently mounted
 - Ambient working temperature: -40T65 °C
 - Intended transportation conditions: -40T65 °C, 10-90%RH (non condensing situation)
 - Max refrigerant temperature: 120 °C

FACTORY SETTING							
MODEL	PRESSURE RANGE [barg]/[psig]	DIFF. RANGE [bar]/[psl]	CUT OUT [barg]/[psig]	CUT IN [barg]/[psig]	DIFF. Pressure [bar]/[psl]	Use terminals	Burst Pressure [bar]/[psl]
D17P45AA1MS200	10-45 / 145-653	5-15 / 73-218	42±1 / 609±14	538 / s551	5-15 / 73-218	3-6	200 / 2900
	-0.3~7 / -4~101	0.6~4 / 9-58	24.0, 15 / 29±2	34.0, 15 / 43±2	14.0, 15 / 14±2	1-2	80 / 1160

Revision History				Dual PRESSURE CONTROLS			
Curr	Prev	Note	Signature	Date			
Designer				Date	D17P45AA1MS200		
Checked							
Verified							
Approved							
					Page 1	Total	
					Weight	Ratio	
						1:-(A3)	

