
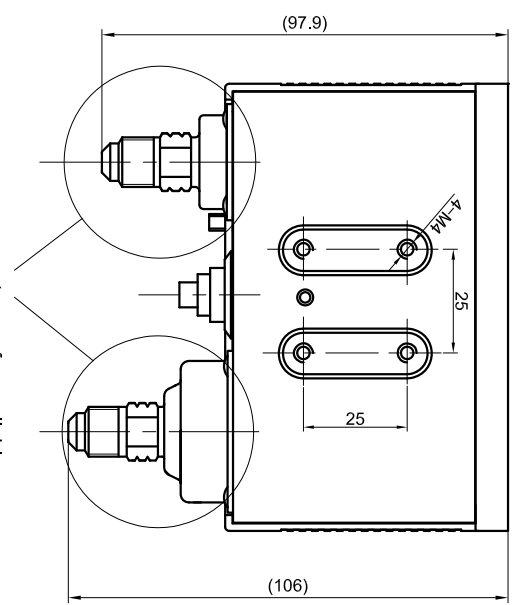


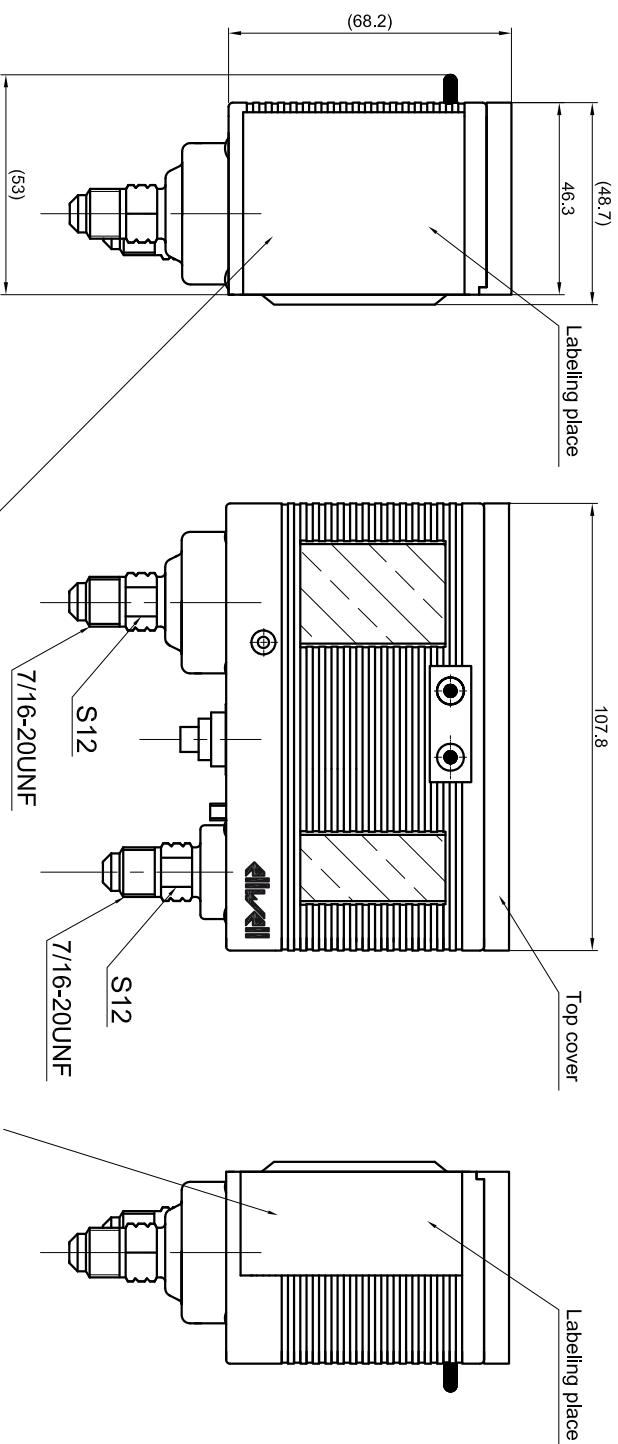


-PS:17 Bar -TA:-40T65 °C -Range:-0.3...7 Barg -Diff.:.51 Bar -Power supply:240Vac	1 0 2 L M H 0 5
-1-2(or 1-5): 16(16)A -1-5(or 1-2): 1(1)A	
Made in China	

Specifications

- Type: manual-manual reset
- Differential: LOW Non Adjustable & HIGH Non Adjustable
- Configuration: Dual
- Contact configuration: SPDT
- Rated current: 1-2 (or 1-5): 16(16)A 240Vac
1-5 (or 1-2): 1(1)A 240Vac
3-4 (or 3-6): 16(16)A 240Vac
3-6 (or 3-4): 1(1)A 240Vac
- Degree of protection: IP30 with top cover
IP20 without top cover
- Method of mounting control: Independently mounted
- Ambient working temperature: -40T65 °C
- Intended transportation conditions: -40T65 °C, 10-90%RH (non condensing situation)
- Max refrigerant temperature: 120 °C

  	D17P30MM1YS400 D17P Dual pressure control manual-manual reset D17P Реле давления сдвоенное ручной-ручной сброс
-PS:35 bar -TA:-40T65 °C -Range:7...31 barg -Diff:≥2 bar -Power supply:240Vac	RN- YYMMDD-SSSSS Made in China
4 0 6 0 3 M H	4 0 6 0 3 M H -3-6(or 3-4): 16(16)A -3-4(or 3-6): 1(1)A

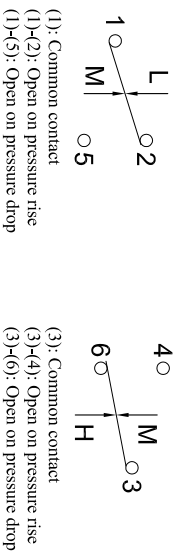

D17P Dual pressure control manual-manual reset
D17P Реле давления сдвоенное ручной-ручной сброс

Product traceability, date and serial number

FACTORY SETTING						
MODEL	PRESSURE RANGE [barg]/[psig]	DIFF. RANGE [bar]/[psl]	CUT OUT [barg]/[psig]	CUT IN [barg]/[psig]	DIFF. Pressure [bar]/[psl]	Use terminals
D17P30MM1NS400	7-31 / 102-450	±2 / ±29	20±0.4 / 290±6	±18 / ±261	±2 / ±29	3-6
D17P30MM1CS400	-0.3-7 / -4-101	±1 / ±14	24.15 / 29±2	±3 / ±43	±1 / ±14	1-2

Revision History				
Curr	Prev	Note	Signature	Date
Designer		Date		
Checked				
Verified				
Approved				

Dual
PRESSURE
CONTROLS

D17P30MM1YS400				
			Weight	Ratio
			1 : 1(A3)	
Page 1			Total	



Schmeider Electric

Product code structure

Type

D

Case size

17 Case 108mm

Product type

P Pressure Switch

Pressure range (xx)

30 7...31 barg

Reset type

MM manual-manual(dual switch)

Product configuration

1 Standard version

Pressure connection (Y)

M 7/16-20UNF

C Capillary flare nut

Pin contact configuration

S Standard AgNi



Kit and packaging

4 1 instruction sheet into bulk

Customization

00 standard model

Available pressure connections

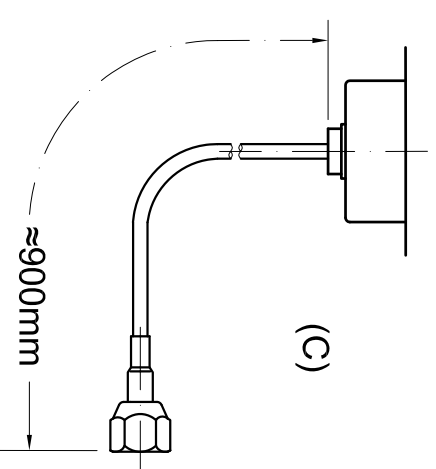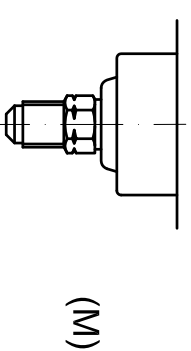[illegible]