


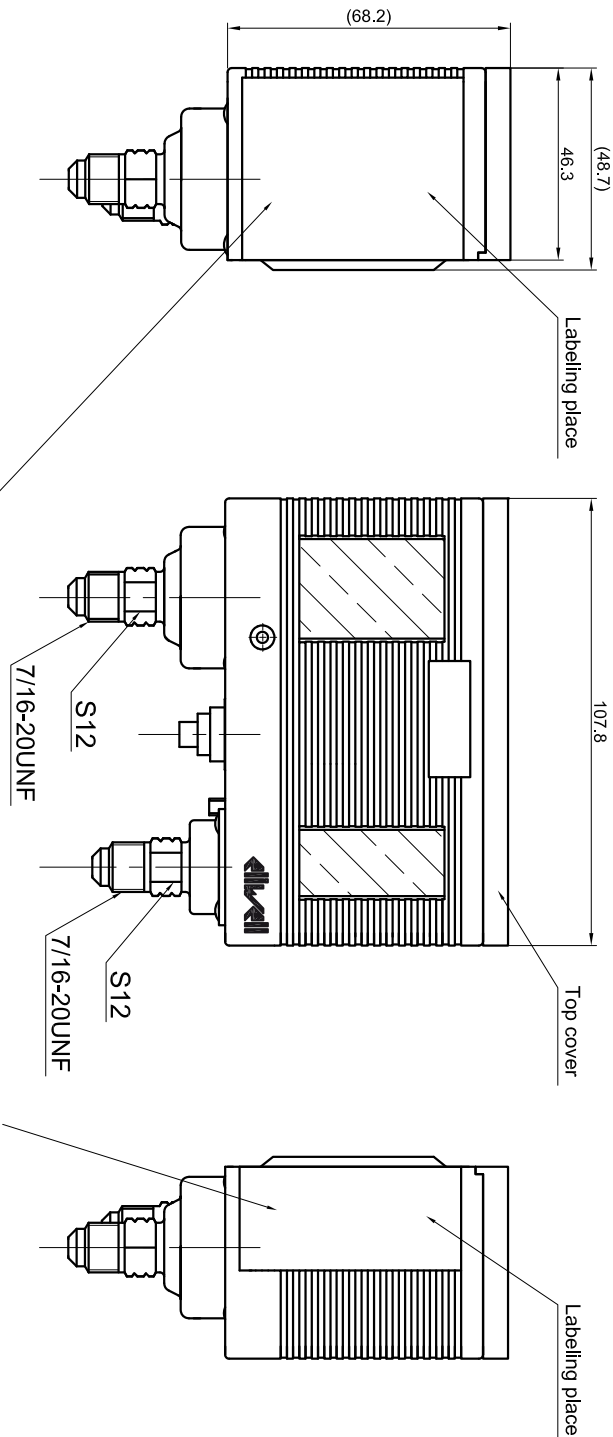

Specifications

- Type: auto-auto reset
- Differential: LOW Adjustable & HIGH Non Adjustable
- Configuration: Dual
- Contact configuration: SPDT
- Rated current: 1-2 (or 1-5): 16(16)A 240Vac
1-5 (or 1-2): 1(1)A 240Vac
3-4 (or 3-6): 16(16)A 240Vac
3-6 (or 3-4): 1(1)A 240Vac
- Degree of protection: IP44 with top cover
IP20 without top cover
- Method of mounting control: Independently mounted
- Ambient working temperature: -40T65 °C
- Intended transportation conditions: -40T65 °C, 10-90%RH (non condensing situation)
- Max refrigerant temperature: 120°C

PS:17 Bar
-TA:-40T65°C
-Range:-0.3...7 Barg
-Diff.:0.6...4 Bar
-Power supply:240Vac

1 0 L 2
0 5



Made in China

CE FHL
20

RN- YYMMDD-SSSSS
Made in China

PS:50 bar
-TA:-40T65°C
-Range:10...45 barg
-Diff:5~15 bar
-Power supply:240Vac

4 0
6 0 3
H
-3-6(or 3-4): 16(16)A
-3-4(or 3-6): 1(1)A

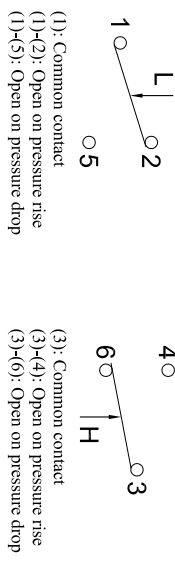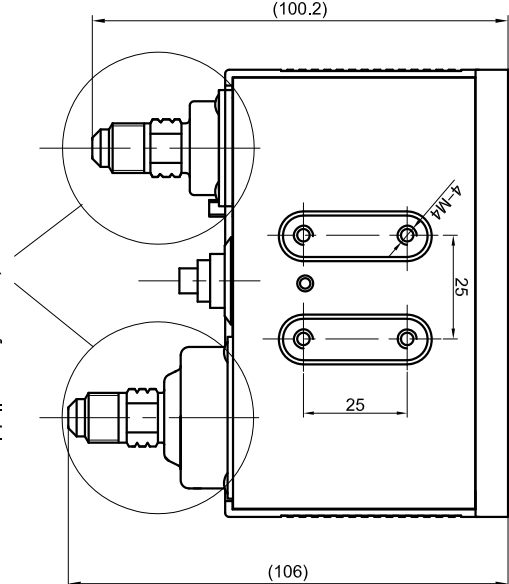

see next page for available
connection variants and accessories

FACTORY SETTING									
MODEL	PRESSURE RANGE [barg]/[psig]	DIFF. RANGE [barg]/[psig]	CUT OUT [barg]/[psig]	CUT IN [barg]/[psig]	DIFF. [barg]/[psig]	Use terminals	Max.PS [barg]/[psig]	Burst Pressure [barg]/[psig]	
D17P45AA1MS400	10-45 / 145-653	5-15 / 73-218	42±1 / 609±14	538 / 5551	5-15 / 73-218	3-6	50 / 725	200 / 2900	
	-0.3-7 / -4-101	0.6-4 / 9-58	24.0, 15 / 29±2	34.0, 15 / 43±2	14.0, 15 / 14±2	1-2	17 / 246	80 / 1160	

Revision History					Dual PRESSURE CONTROLS				
Curr	Prev	Note	Signature	Date					
Designer		Date							
Checked									
Verified									
Approved									

D17P45AA1MS400			
		Weight	Ratio
			1:1(A3)
Page 1		Total	



by Schneider Electric

