
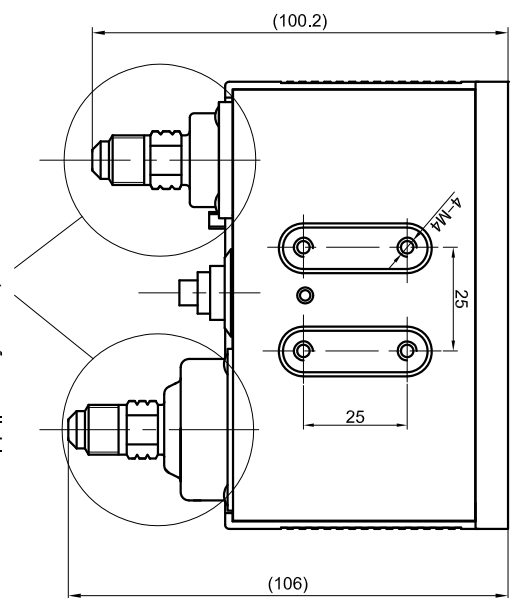
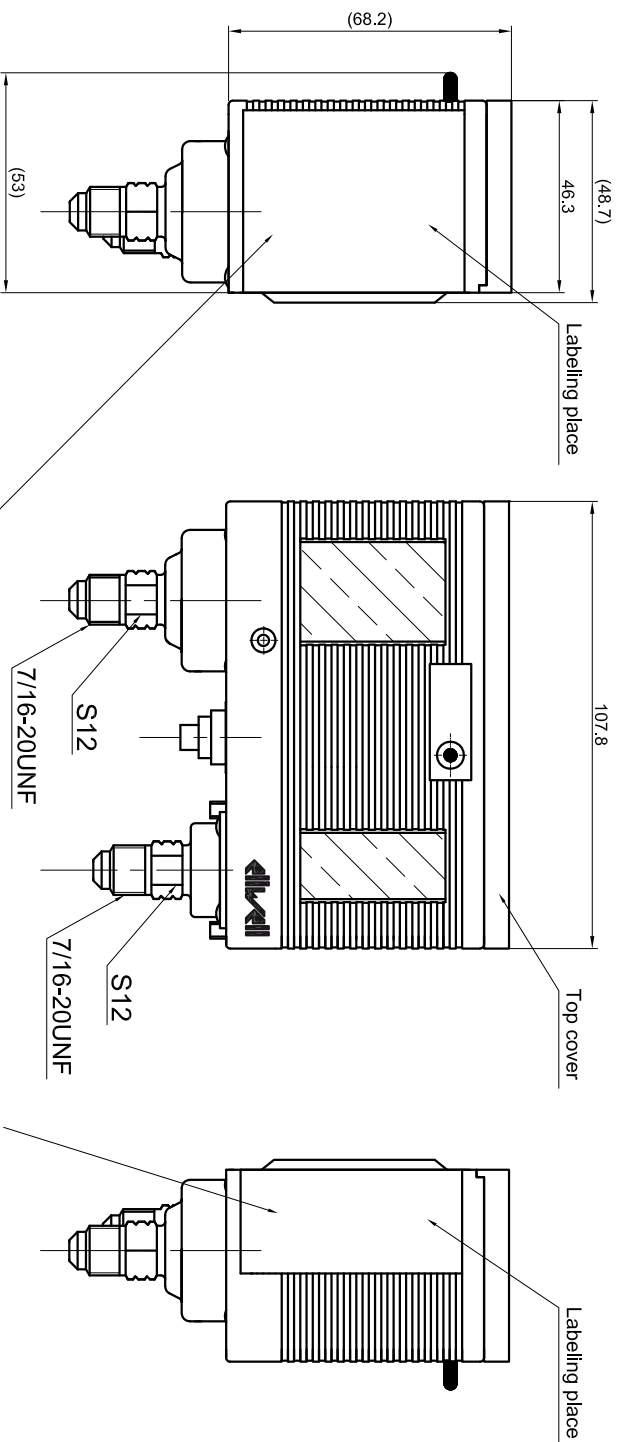





Specifications

- Type: auto-manual reset
- Differential: LOW Adjustable & HIGH Non Adjustable
- Configuration: Dual
- Contact configuration: SPDT
- Rated current: 1-2 (or 1-5): 16(16)A 240Vac
1-5 (or 1-2): 1(1)A 240Vac
3-4 (or 3-6): 16(16)A 240Vac
3-6 (or 3-4): 1(1)A 240Vac
- Degree of protection: IP30 with top cover
IP20 without top cover
- Method of mounting control: Independently mounted
- Ambient working temperature: -40T65 °C
- Intended transportation conditions: -40T65 °C, 10-90%RH (non condensing situation)
- Max refrigerant temperature: 120°C

-PS:17 Bar -TA:-40T65°C -Range:-0.3...7 Barg -Diff.:0.6...4 Bar -Power supply:240Vac	1 0 L 0.2 0.5
Made in China	

 Elwell Controls srl D17P Dual press contr auto-man reset45bar D17P Реле давления сдвоенное авто-ручной сброс (45bar)	D17P45AM1MS400	 RN- YYMMDD-SSSSS Made in China	 4 0 6 0 3 H -PS:50 bar -TA:-40T65°C -Range:10...45 barg -Diff:58 bar -Power supply:240Vac	 4 0 6 0 3 H -3-6(or 3-4): 16(16)A -3-4(or 3-6): 1(1)A
---	-----------------------	--	---	--

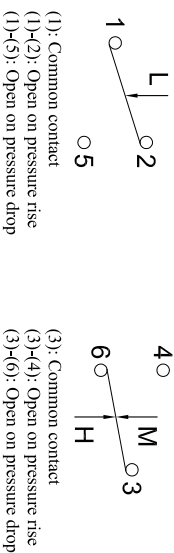

D17P Dual press contr auto-man reset45bar
D17P Реле давления сдвоенное авто-ручной сброс (45bar)

Product traceability, date and serial number

FACTORY SETTING					
MODEL	PRESSURE RANGE [barg]/[psig]	DIFF RANGE [bar]/[psi]	CUT OUT [barg]/[psig]	CUT IN [barg]/[psig]	DIFF. Pressure [bar]/[psi]
D17P45AM1MS400	10-45/ 145-653	58 / 5116	42±1/ 609±14	±33 / 2479	58 / 5116
	-0.3-7 / -4-101	0.6-4 / 9-58	24.15 / 29±2	34.0.15 / 43±2	14.0.15 / 14±2

Revision History				Dual PRESSURE CONTROLS	
Curr Prev	Note	Signature	Date		
Designer		Date			
Checked					
Verified					
Approved					
D17P45AM1MS400				Weight	Ratio
				1:1(A3)	
				Page1	Total

